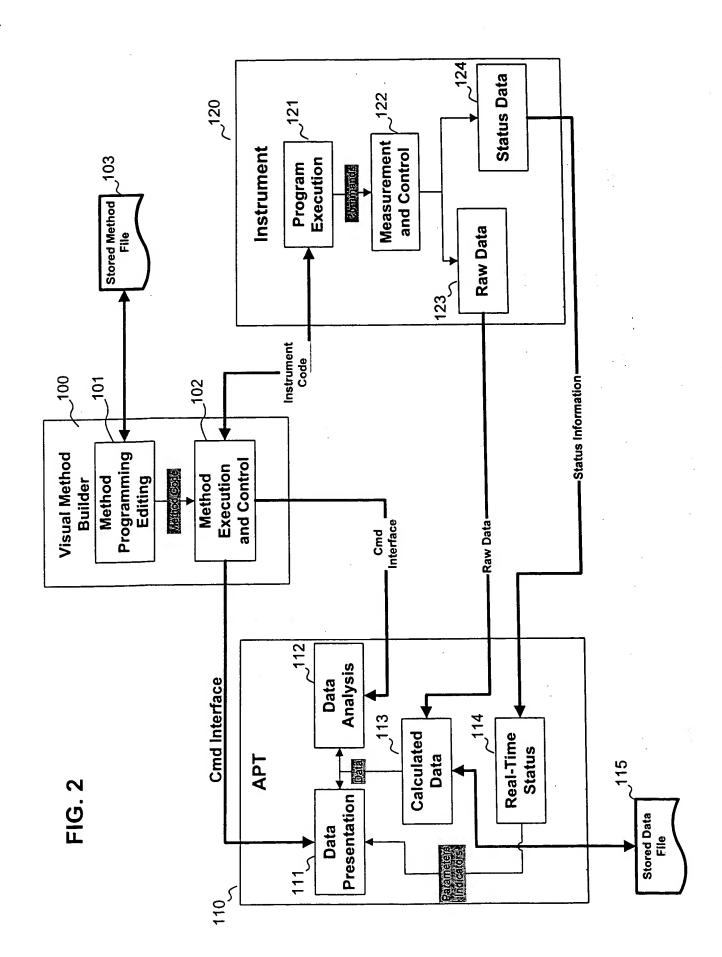
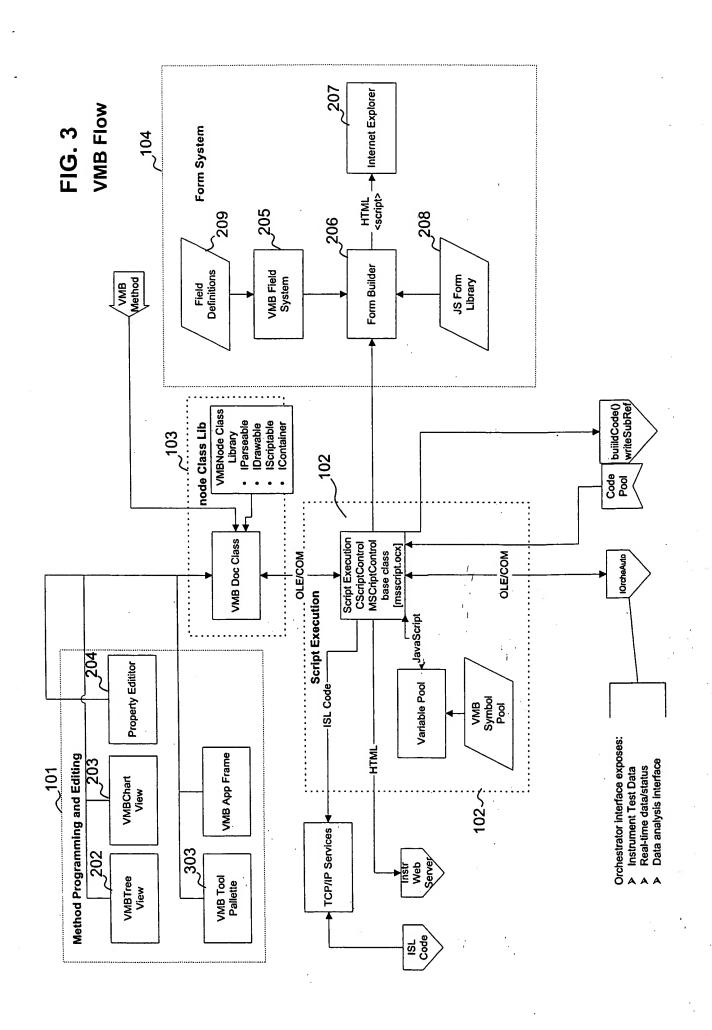
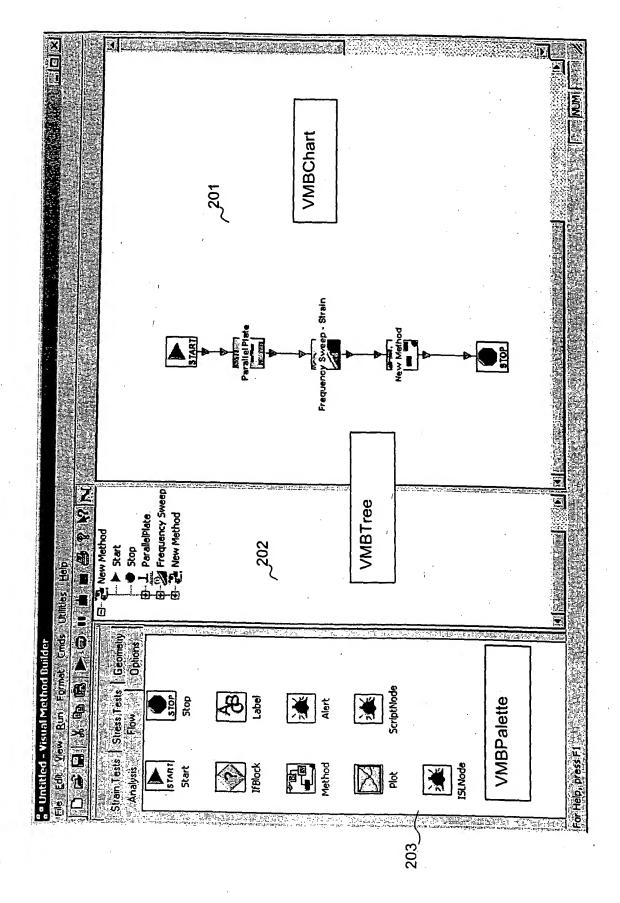


FIG. 1








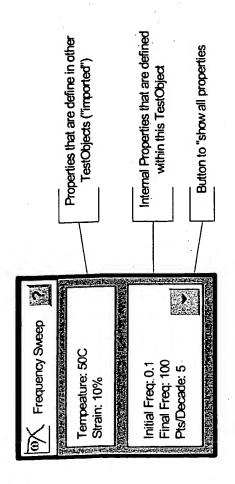


FIG. 5



Options Geometry									
: 0 <u>0</u>		> :	8	8_	6-8	₩		ent	
asts 📑	1/3	requence	Pa sa	T Sweep	Ramp s Mode	T T T T T T T T T T T T T T T T T T T	[5]	Transl Stress	
Flow tress T	5/4	Freque	E S	ž EZ	Temp F Stress	Creep		L ty	
## S		,	•		, ,				
ဖွ	les E	Point	Steps	ម្ត ្រួម	Sweep	Stress	P	Stress	
Analysis Rain Tes	24	Single P Stre	S dwo	Stress Stress		Stdy Stre		⋧ ∝	
- F		泛	<u>•</u>		֓֞֝֞֜֟֟֟֟֟֟֟֟ ֓֓֓֓֓֞֓֓֞֓֓֞֓֓֞֞֓֓֓֓֓֓֞֞֩	₩.		ห้	


R NSRFreq.vsd:FrequencySweep	1. 1. 2.	
Analysis Modules		eigestein)
Dynamic Tests		
Steady Tests		
Test Geometries		
	' ''	₩.
25mm Plate 8mm Plate 50mm Plate Cone&Plat	e Couette One Co	uette Iwo
8mm 8mm Cone&PE		
Pire 0 Place 10		
Control of the Contro		
		· - '
Transient Tests		

FIGURE 8

		Delete
	frue true true true true true true true t	
	10.00000 10.00000 10.00000 10.00000 10.00000 10.00000	New
	Type Double Double Integer Double Double Double	
dTempCmd Value 10.00000 Value 10.00000 Value Value 10.00000 Value Value 10.00000 Layer D 10.000000 The Commanded Temperature	Property dFreq dFreq iSweepMode dInitStressDyn dFinalStressDyn dFinalStressDyn dFinalStressDyn dStressIncr	SOU

-

Sveep Mode	ist rrequenty j				さんかん かんかん かんかんかん
Log © Lhnaar Log Ldvn/cm2] Max=100.0 Ldvn/cm2] Max=100.0	かん かんしている かんしん	A.S. 52	できないのかときいいもののできたった。		
0.0 0.0	reep Mode	, Fod			scrate 🤇
0.0	itial Strass	10.0	[dyn/cm2] Max	100.0 Min	TO'0-1
Max=50 Max=50 OK	Firs Stress	10.0	[dyn/em2] Max=	-100.0 MIn	10.0-
Points pariDetade 5 Max=500 Min=2	oints per Deca	Je 5	Max=SDO MIn=2		
K. Jok II	oints par Deca	de 5	Max-500 Min=2		
TSOK Cancel					
			Cancel		

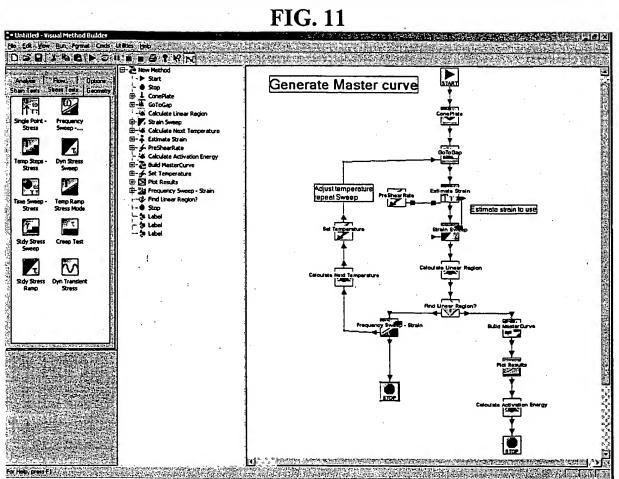

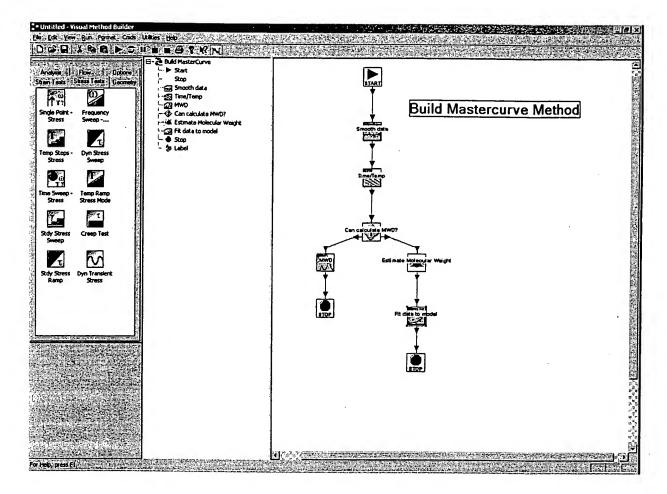


FIG. 12